




3.7Warmcable

3.7 WarmCable Electric Floor Heating Cable System

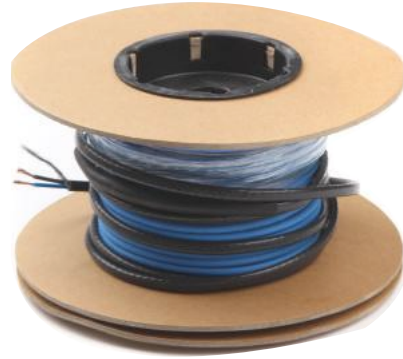

- Single point connection
- Emits zero EMF (electromagnetic fields)
- Safety approved for wet locations
- Durable construction
- Twin-conductor cable
- Flexible installation
- 25 years limited warranty

3.7 WarmCable Specifications

Cable Construction:	Twin conductor
Rated Voltage:	120V,240V
Output:	3.7W/ft±10%
Bending radius:	6D
Cable Diameter:	1/5"
Conductor Insulation:	Fluoropolymer
Outer Insulation:	PVC
Max. Ambient Temp.:	85 °F (30 °C)
Min. Installation Temp.:	40 °F (5 °C)
Cold lead	10ft (3m) length



Ordering Information

120V	Length		Approximate heat coverage (sq.ft.)			Watts (3.7W/ft.)	Amps	ohms
Catalog Number	ft.	m	2.4" spacing	Standard 3.6" spacing	4.8" spacing			
3.7 warmcable-0060-1	16.5	5.05	3.3	5.0	6.7	60	0.5	240.0
3.7 warmcable-0120-1	33.0	10.1	6.7	10.0	13.3	120	1.0	120.0
3.7 warmcable-0180-1	49.5	15.1	10.0	15.0	20.0	180	1.5	80.0
3.7 warmcable-0240-1	66.0	20.1	13.3	20.0	26.7	240	2.0	60.0
3.7 warmcable-0300-1	82.5	25.1	16.7	25.0	33.3	300	2.5	48.0
3.7 warmcable-0360-1	99.0	30.2	20.0	30.0	40.0	360	3.0	40.0
3.7 warmcable-0420-1	115.5	35.2	23.3	35.0	46.7	420	3.5	34.3
3.7 warmcable-0480-1	132.0	40.2	26.7	40.0	53.3	480	4.0	30.0
3.7 warmcable-0540-1	148.5	45.3	30.0	45.0	60.0	540	4.5	26.7
3.7 warmcable-0600-1	165.0	50.3	33.3	50.0	66.7	600	5.0	24.0
3.7 warmcable-0720-1	198.0	60.4	40.0	60.0	80.0	720	6.0	20.0
3.7 warmcable-0840-1	231.0	70.4	46.7	70.0	93.3	840	7.0	17.1
3.7 warmcable-0960-1	264.0	80.5	53.3	80.0	106.7	960	8.0	15.0
3.7 warmcable-1080-1	297.0	90.5	60.0	90.0	120.0	1080	9.0	13.3
3.7 warmcable-1200-1	330.0	100.6	66.7	100.0	133.3	1200	10.0	12.0
3.7 warmcable-1320-1	363.0	110.6	73.3	110.0	146.7	1320	11.0	10.9
3.7 warmcable-1440-1	396.0	120.7	80.0	120.0	160.0	1440	12.0	10.0
3.7 warmcable-1560-1	429.0	130.8	86.7	130.0	173.3	1560	13.0	9.2
3.7 warmcable-1680-1	462.0	140.8	93.3	140.0	186.7	1680	14.0	8.6
3.7 warmcable-1800-1	495.0	150.9	100.0	150.0	200.0	1800	15.0	8.0



3.7Warmcable

240V	Length		Approximate heat coverage (sq.ft.)			Watts (3.7W/ft.)	Amps	ohms
Catalog Number	ft.	m	2.4" spacing	Standard 3.6" spacing	4.8" spacing			
3.7 warmcable-0120-2	33.0	10.1	6.7	10.0	13.3	120	0.5	480.0
3.7 warmcable-0180-2	49.5	15.1	10.0	15.0	20.0	180	0.8	320.0
3.7 warmcable-0240-2	66.0	20.2	13.3	20.0	26.7	240	1.0	240.0
3.7 warmcable-0300-2	82.5	25.1	16.7	25.0	33.3	300	1.3	192.0
3.7 warmcable-0360-2	99.0	30.2	20.0	30.0	40.0	360	1.5	160.0
3.7 warmcable-0420-2	115.5	35.2	23.3	35.0	46.7	420	1.8	137.1
3.7 warmcable-0480-2	132.0	40.2	26.7	40.0	53.3	480	2.0	120.0
3.7 warmcable-0540-2	148.5	45.3	30.0	45.0	60.0	540	2.3	106.7
3.7 warmcable-0600-2	165.0	50.2	33.3	50.0	66.7	600	2.5	96.0
3.7 warmcable-0720-2	198.0	60.4	40.0	60.0	80.0	720	3.0	80.0
3.7 warmcable-0840-2	231.0	70.4	46.7	70.0	93.3	840	3.5	68.6
3.7 warmcable-0960-2	264.0	80.4	53.3	80.0	106.7	960	4.0	60.0
3.7 warmcable-1080-2	297.0	90.6	60.0	90.0	120.0	1080	4.5	53.3
3.7 warmcable-1200-2	330.0	100.6	66.7	100.0	133.3	1200	5.0	48.0
3.7 warmcable-1440-2	396.0	120.8	80.0	120.0	160.0	1440	6.0	40.0
3.7 warmcable-1680-2	462.0	140.8	93.3	140.0	186.7	1680	7.0	34.3
3.7 warmcable-1920-2	528.0	161.0	106.7	160.0	213.3	1920	8.0	30.0
3.7 warmcable-2160-2	594.0	181.0	120.0	180.0	240.0	2160	9.0	26.7
3.7 warmcable-2400-2	660.0	201.2	133.3	200.0	266.7	2400	10.0	24.0
3.7 warmcable-2640-2	726.0	221.2	146.7	220.0	293.3	2640	11.0	21.8
3.7 warmcable-2880-2	792.0	241.4	160.0	240.0	320.0	2880	12.0	20.0
3.7 warmcable-3120-2	858.0	261.6	173.3	260.0	346.7	3120	13.0	18.5
3.7 warmcable-3360-2	924.0	281.6	186.7	280.0	373.3	3360	14.0	17.1
3.7 warmcable-3600-2	990.0	301.8	200.0	300.0	400.0	3600	15.0	16.0

Wuhu jiahong New Material CO., Ltd

www.ahjiahong.com

Address: No.86 Guandoumen Road, Jiujiang Economic Development Zone, China (Anhui) Pilot Free Trade Zone Wuhu Zone TEL: 0086-553-5317448, FAX:0086-553-5317408