


## Minicable S

Combined the highest comfort levels with maximum energy efficiency.  
It's a proven technology that's safe, reliable and energy efficient.

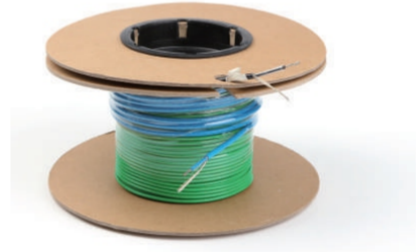

- Double point connection
- Very thin, only 2.6 mm
- Flexible installation
- 25 years limited warranty
- Single conductor
- Safety approved for wet locations
- Durable construction

### MiniCable S Specifications

|                                 |                                |
|---------------------------------|--------------------------------|
| Cable Construction:             | Single conductor               |
| Rated Voltage:                  | 230V                           |
| Output:                         | 11W/m, 11.5W/m, 12.5W/m, 15W/m |
| Cable Diameter:                 | 2.5mm-2.8mm                    |
| Conductor Insulation:           | Fluoropolymer                  |
| Max. Ambient Temp:              | 85°F(30°C)                     |
| Min. Installation Temp:         | 40°F(5°C)                      |
| Cold lead:                      | two 2.5m length each           |
| Smooth Connection applications: | yes                            |

## Ordering Information

| 230V               | Length (m) | Watts<br>(11W/m) | Amps | Ohms  |
|--------------------|------------|------------------|------|-------|
| Catalog Number     |            |                  |      |       |
| MiniCableS/11-100  | 9.1        | 100              | 0.4  | 529.0 |
| MiniCableS/11-200  | 18.2       | 200              | 0.9  | 264.5 |
| MiniCableS/11-300  | 27.3       | 300              | 1.3  | 176.3 |
| MiniCableS/11-400  | 36.4       | 400              | 1.7  | 132.3 |
| MiniCableS/11-500  | 45.5       | 500              | 2.2  | 105.8 |
| MiniCableS/11-600  | 54.5       | 600              | 2.6  | 88.2  |
| MiniCableS/11-700  | 63.6       | 700              | 3.0  | 75.6  |
| MiniCableS/11-800  | 72.7       | 800              | 3.5  | 66.1  |
| MiniCableS/11-900  | 81.8       | 900              | 3.9  | 58.8  |
| MiniCableS/11-1000 | 90.9       | 1000             | 4.3  | 52.9  |
| MiniCableS/11-1200 | 109.1      | 1200             | 5.2  | 44.1  |
| MiniCableS/11-1500 | 136.4      | 1500             | 6.5  | 35.3  |
| MiniCableS/11-1800 | 163.6      | 1800             | 7.8  | 29.4  |

| 230V                 | Length (m) | Watts<br>(11.5W/m) | Amps | Ohms  |
|----------------------|------------|--------------------|------|-------|
| Catalog Number       |            |                    |      |       |
| Minicables/11.5-200  | 17.4       | 200                | 0.9  | 264.5 |
| Minicables/11.5-300  | 26.1       | 300                | 1.3  | 176.3 |
| Minicables/11.5-400  | 34.8       | 400                | 1.7  | 132.3 |
| Minicables/11.5-500  | 43.5       | 500                | 2.2  | 105.8 |
| Minicables/11.5-600  | 52.2       | 600                | 2.6  | 88.2  |
| Minicables/11.5-700  | 60.9       | 700                | 3.0  | 75.6  |
| Minicables/11.5-800  | 69.6       | 800                | 3.5  | 66.1  |
| Minicables/11.5-900  | 78.3       | 900                | 3.9  | 58.8  |
| Minicables/11.5-1000 | 87.0       | 1000               | 4.3  | 52.9  |
| Minicables/11.5-1250 | 108.7      | 1250               | 5.4  | 42.3  |
| Minicables/11.5-1500 | 130.4      | 1500               | 6.5  | 35.3  |
| Minicables/11.5-1750 | 152.2      | 1750               | 7.6  | 30.2  |

## Warranty

Cable/Mat: 25 years limited warranty against defects in material, design, or workmanship.

## Approvals

